
S3215E/S3219E

ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric scissor lifts
- Compact & nimble
- Drives through a standard doorway
- Suitable for indoor and outdoor use
- Easy to use & maintain

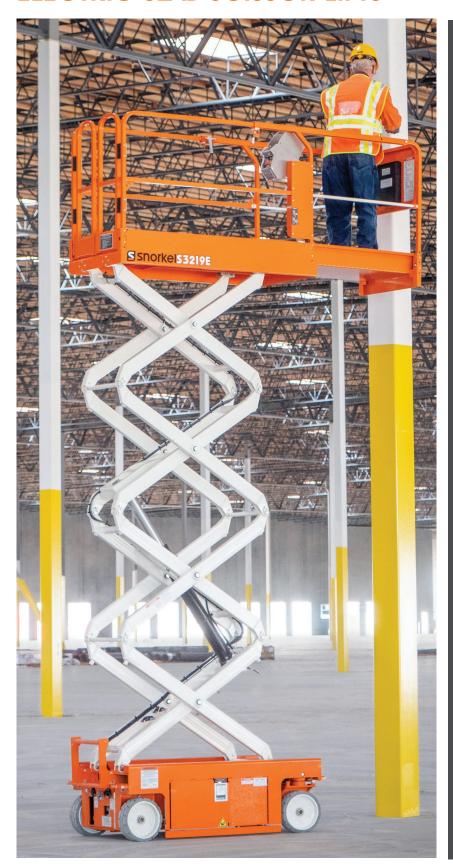

ELECTRIC SLAB SCISSOR LIFTS


DIMENSIONS	\$3215E	\$3219E
Max. working height	21 ft	25 ft
Max. platform height (A)	15 ft	19 ft
Platform size (stowed)	28.25 in x 63.75 in	28.25 in x 63.75 in
Platform size (extended)	28.25 in x 99.75 in	28.25 in x 99.75 in
Deck extension length	36 in	36 in
Overall length (C) (with step)	70.4 in	70.4 in
Overall length (C) (with step removed)	68.3 in	68.3 in
Overall width (D)	32 in	32 in
Stowed height (B)	79 in	83 in
Min. height (guardrails folded)	62.6 in	65 in
Ground clearance (stowed)	2.63 in	2.63 in
Ground clearance (elevated)	0.75 in	0.75 in
PERFORMANCE		

PERFORMANCE			
Platform capacity (SWL)	600 lbs	550 lbs	
Max. wind speed	28 mph	28 mph	
Max. drive height	15 ft	19 ft	
Max. drive speed (stowed)	2.0 mph	2.0 mph	
Max. drive speed (elevated)	0.4 mph	0.4 mph	
Raise/lower time	20/36 sec	20/36 sec	
Gradeability	25%	25%	
Inside turning radius	4 in	4 in	
Outside turning radius	64.25 in	64.25 in	
Tires	12 x 4 non-marking rubber		
Controls	proportional		
Drive system	2-wheel drive		


Drive system	z-wneer drive		
POWER			
Power source	24V DC battery electric		
Charger	90 - 240V, 25amp		

WEIGHT		
Weight	2,700 lbs	3,170 lbs

TURNING RADIUS



S3215E/S3219E



STANDARD FEATURES

- Roll-out deck extension with dual locks
- Non-marking tires
- Swing-out service trays
- Saloon-door style entry gates
- Descent alarm
- All motion alarm
- 2 persons indoor
- 1 person outdoor
- Proportional controls, including descent
- Power line to platform
- Loading pendant
- Platform overload system
- Flashing amber light
- Hour meter & on-board diagnostics display
- Integrated battery charger
- Battery condition indicator
- Crane & forklift points
- Dual lanyard attachments points
- Scissor stack roller slide plates (set of 2)
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

OPTIONS

- Special paint colors
- 110V AC 800W inverter
- Airline to platform
- Aircraft bumpguard package
- Environmental hydraulic oil
- Snorkel Guard™ secondary guarding system
- Snorkel OnSite™ telematics
- Panel carrier
- Pipe rack
- Top rail



vw.snorkellifts.com